



Waygate Technologies film digitizer

FS50B

Waygate Technologies film digitizers FS50B are designed to provide high-end performance in film digitizing, offering superior quality at high throughput. The steel housing gives the robustness needed for the industrial environment of NDT applications. All standard film formats can be digitized, up to a width of 14 inch (35 cm), without length limitation in any resolution between 50 μm and 500 μm . The FS50B is the first and only digitizer on the market that can handle the full density range ($D = 0$ up to 4.70 D) in one working range with the requested contrast sensitivity. This makes the scanner meet the requirements for class DS film digitizers, according to EN 14096 part 2. This classification has been evaluated and confirmed by BAM, the German Federal Institute for Materials Research and Testing.

The system employs a HeNe laser beam, which sweeps across the film by a polygon mirror system. The F-Teta lens avoids distortions of the image, by keeping the optical distance of the laser beam unchanged at all spots of the scanned area. The logarithmic amplification process guarantees high signal to noise ratios up to 4.70 density.




Every scanner is calibrated and characterized at the time of shipment, and a unit-specific LUT is delivered with each machine. This guarantees an artifact-free scanning at the highest possible precision, repeatability and speed. A 14 x 17 inch film can be digitized in as little as 7 seconds.

The cost-effective film digitization solution for anyone handling archives, for easy image transfer or for using the advanced viewing features of the Waygate Technologies system.

Technical specifications FS50B

Light source	HeNe laser 632.8 nm
Laser scan resolution	50 µm to 500 µm in steps of 1 µm
Density range FS50B	0.05 to 4.7 D
Scan speed	14 x 17 inch: 7 sec (Speed mode, 200 µm) 14 x 17 inch: 120 sec (Quality mode, 50 µm)
Pixel depth	12 bit (4096 gray levels) logarithmic
Film size	Min: 60 mm - 2.4 inch width Max: 355 mm - 14 inch width
Weight	45 kg
Dimensions	526 x 764 x 330 mm - 13 x 21 x 30 inch
Interface	SCSI, SCSI II
Power	100 - 120 V; 200 - 240 V 50 / 60 Hz; 400 W
Safety labels	CE, UL, GS
Operating condition	15 - 30 °C (59 - 86 °F), 30 - 75% RH
Storing condition	10 - 40 °C (14 - 104 °F), 10 - 90% RH
Transportation condition	10 - 50 °C (14 - 122 °F), 10 - 90% RH

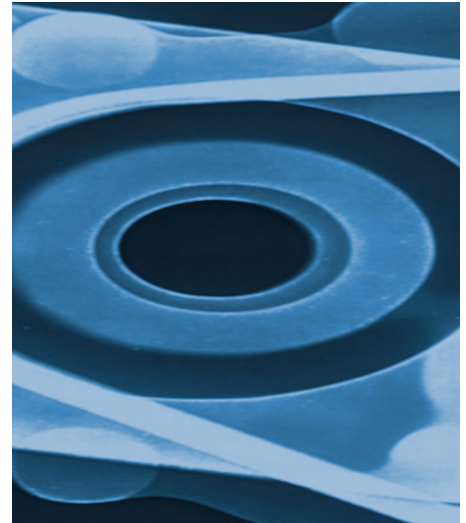

Film digitizer FS50B

For more information contact
sales@intechnde.com
or visit
www.intechnde.com



Inspection Solutions

British Columbia
140 - 8851 Beckwith Road
Richmond, B.C.
V6X 1V4
Tel: 604 276 8006
Fax: 604 276 8725
Toll Free: 1 800 677 8884

Alberta
6211 Roper Road
Edmonton, Alberta
T6B 3G6
Tel: 780 448 9575
Fax: 780 466 1280
Toll Free: 1 888 576 7756

Ontario
#48 1200 Speers Road
Oakville, Ontario
L6L 2X4
Tel: 289 430 0286
Fax: 780 466 1280